



PRODUCT LCD MODULE

产品名称：液晶显示模块

MODELNO

模块型号：JMD144050A

SUPPLIER

供应商：

DATE

日期：2020-05-29

Customer number

客户编号：

SPECIFICATION

产品规格书

Version: V0


版本: V0

This module uses ROHS material

模块用环保材料

		Customer (客户)
PREPARED BY 制定		
CHECKED BY 审核		
Quality Department 品质		
Approved by 批准		
		Approved By

2. OUTLINE DRAWING 外形尺寸

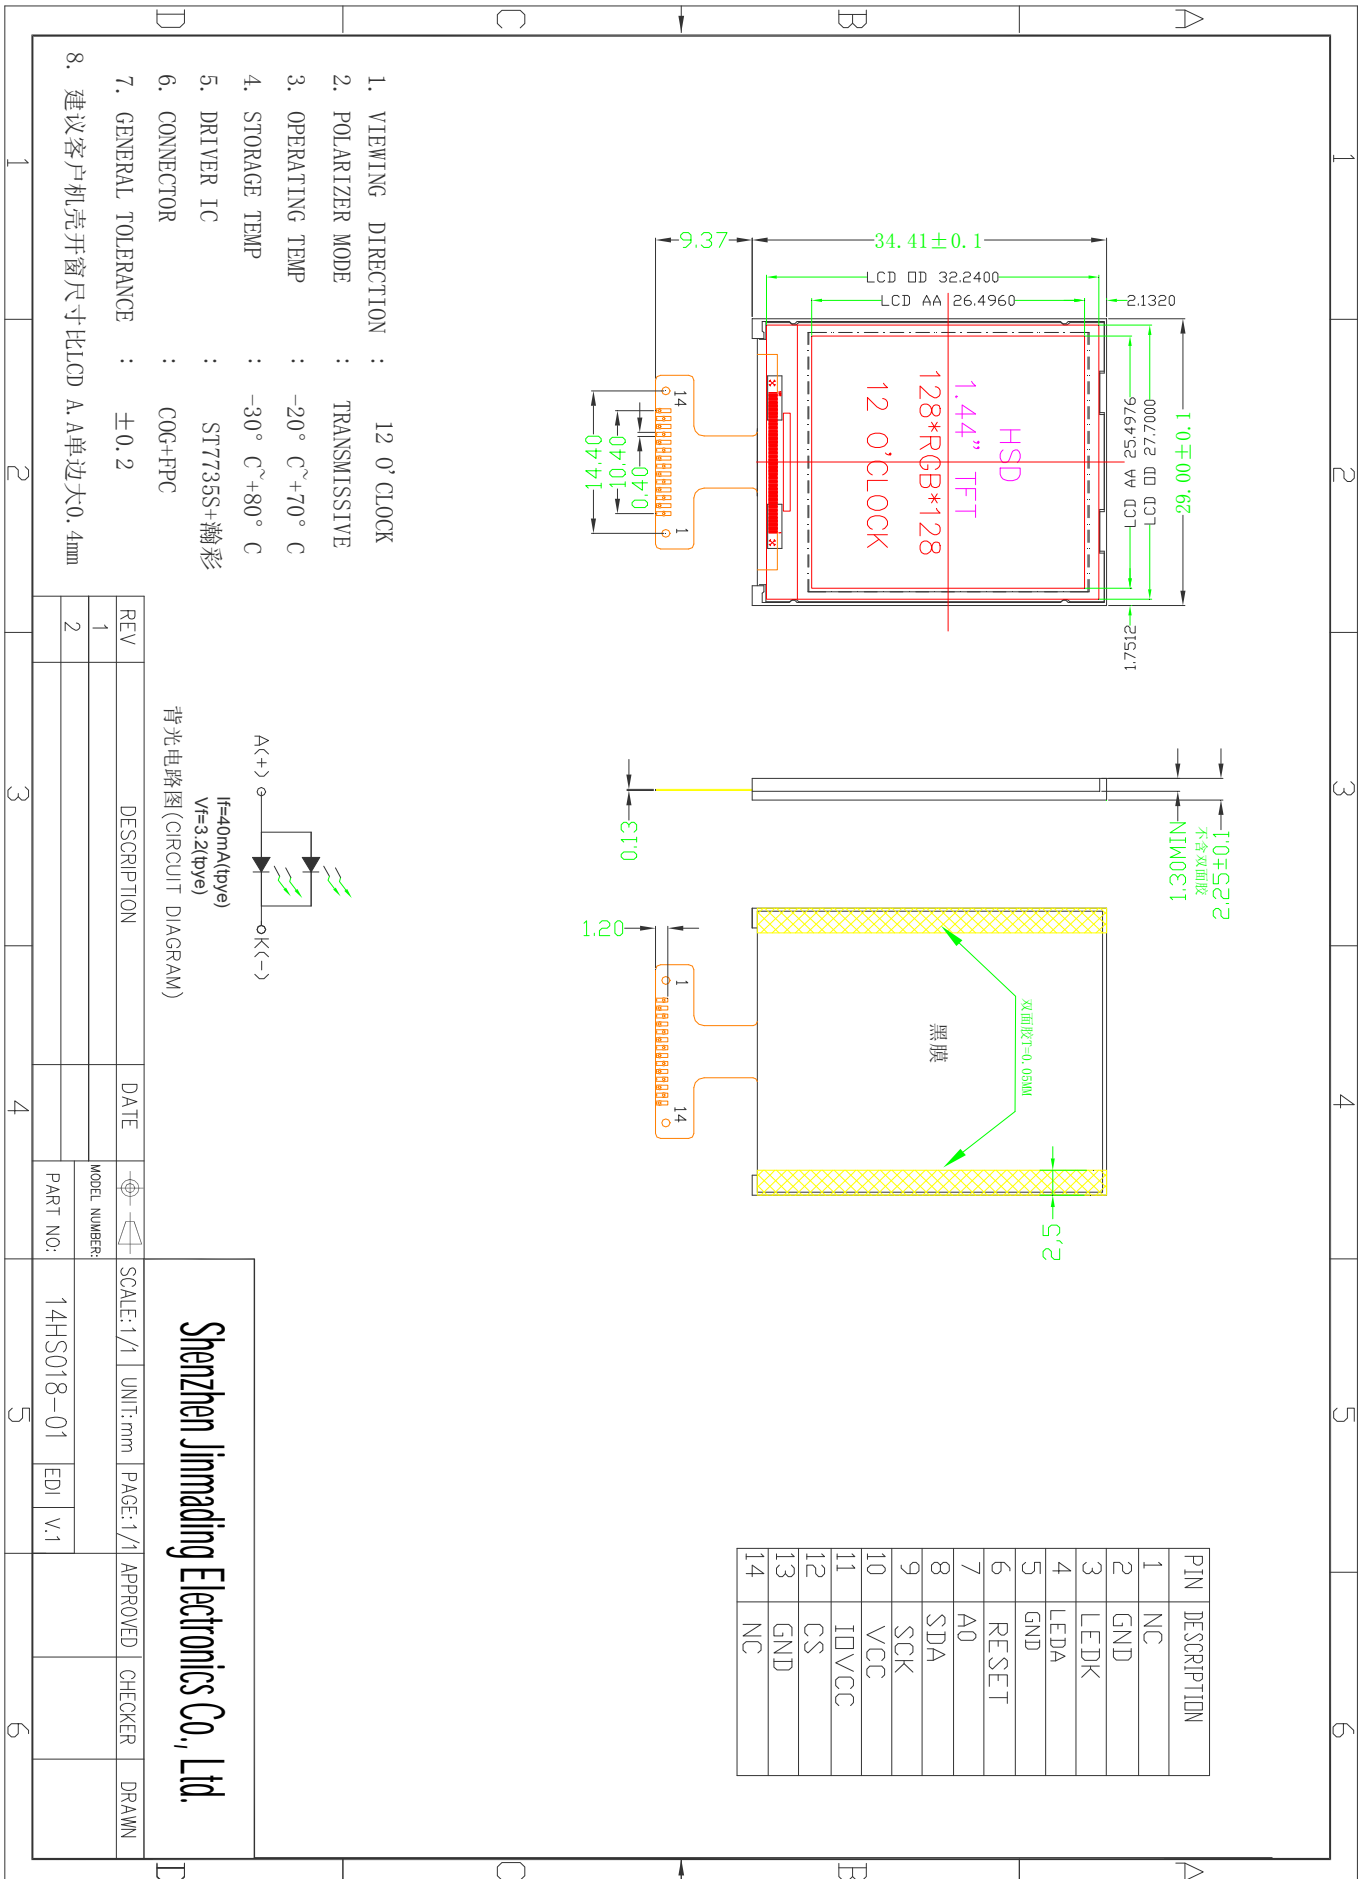

3. ABSOLUTE MAXIMUM RATINGS 极限参数

Item 项目	Symbol 符号	Min 最小值	Max 最大值	Unit 单位
Supply voltage for logic 逻辑电压	VDD	-0.3	4.6	V
Input voltage 输入电平	VIN	-0.3	VDD+ 0.3	V
Operating temperature 使用温度	TOP	-20	70	°C
Storage temperature 存储温度	TST	-30	80	°C
Humidity 湿度	RH		90%(Max60 °C)	RH

4. ELECTRICAL CHARACTERISTICS 模块电气特性

Item 项目	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位
Supply voltage for logic 逻辑电压	VDD	2.7	2.8	3.3	V
Input Current 输入电流	Idd		TBD	TBD	mA
Input voltage 'H' level 输入高电平	VIH	0.7VDD	-	VDD	V
Input voltage 'L' level 输入低电平	VIL	VSS		0.3VDD	V
Output voltage 'H' level 输出高电平	VOH	0.8VDD		VDD	V
Output voltage 'L' level 输出低电平	VOL	VSS		0.2VDD	V

5. BACKLIGHT CHARACTERISTICS 背光电气特性

Item 项目	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位	Condition 条件
Forward voltage 正向电压	Vf	3.0	3.2	3.4	V	If=1*20mA
Number of LED LED数量			1		Piece	
Connection mode 连接类型	P		Parallel			

Using condition: constant current driving method If=20mA(+/-10%).

使用条件: 恒流的驱动方式是 If=20mA(+/-10%).

6. ELECTRO-OPTICAL CHARACTERISTICS 光电参数

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
Transmittance(LCM)	T(%)	-	5	-	%	
Contrast Ratio (LCM)	C/R	-	150	-		
Response Time (TFT)	Tr+Tf	-	50	-	msec	
Surface Luminance (LCM)	lv	TBD			cd/m ²	
CIE Color Coordinate (LCM)	Rx	0.5156	0.5656	0.6156	-	
	Ry	0.2620	0.3120	0.3620	-	
	Gx	0.2714	0.3214	0.3714	-	
	Gy	0.5400	0.5900	0.6400	-	
	Bx	0.0946	0.1446	0.1946	-	
	By	0.0415	0.0915	0.1415	-	
	Wx	0.2054	0.2754	0.3454	-	
	Wy	0.2441	0.3141	0.3841	-	
Viewing Angle (TFT)	θ_l	-	45	-	Degree	
	θ_r	-	45	-		
	θ_u	-	35	-		
	θ_d	-	15	-		

7. READ/WRITE TIMING 读/写时序

Signal	Symbol	Parameter	Min	Max	Unit	Description
CSX	T _{CSS}	Chip select setup time (write)	15		ns	
	T _{CSH}	Chip select hold time (write)	15		ns	
	T _{CSS}	Chip select setup time (read)	60		ns	
	T _{SCC}	Chip select hold time (read)	65		ns	
	T _{CHW}	Chip select "H" pulse width	40		ns	
SCL	T _{SCYCW}	Serial clock cycle (Write)	66		ns	
	T _{SHW}	SCL "H" pulse width (Write)	15		ns	
	T _{SLW}	SCL "L" pulse width (Write)	15		ns	
	T _{SCYCR}	Serial clock cycle (Read)	150		ns	
	T _{SHR}	SCL "H" pulse width (Read)	60		ns	
	T _{SLR}	SCL "L" pulse width (Read)	60		ns	
SDA (DIN)	T _{SDS}	Data setup time	10		ns	
	T _{SDH}	Data hold time	10		ns	
DOUT	T _{ACC}	Access time	10	50	ns	For maximum CL=30pF
	T _{OH}	Output disable time	15	50	ns	For minimum CL=8pF

NOTE :This section is only for reference,Details please refer to the IC specification.

备注：本节仅供参考，详细信息请参阅 IC 规格书

8. INTERFACE DESCRIPTION 接口定义描述

PIN	DESCRIPTION
1	NC
2	GND
3	LEDK
4	LEDA
5	GND
6	RESET
7	A0
8	SDA
9	SCK
10	VCC
11	IOVCC
12	CS
13	GND
14	NC

Note: The voltage power of the interface logic pin depend on IOVCC and GND, Such as DBn, IMn and function pins

9. REFERENCE APPLICATION CIRCUIT 参考应用电路

Please consult our technical department for detail information.
详细信息请联系我们的技术部门

10. RELIABILITY TEST CONDITIONS 可靠性试验条件

No. 序号	Test Item 试验项目	Test condition 试验条件	Inspection after test 判断标准
1	High Temperature Storage 高温存放	80°C±2°C 96H	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 试验结束后, 已测试的 LCD 样品必须在室内正常温湿度环境下放置 2~4 个小时以上才能进行功能和外观检查, 样品不允许有以下缺陷: 1.Air bubble in the LCD; 模块中有气泡; 2.Sealleak; 封口松脱; 3.Non-display; 不显示; 4.missing segments; 漏笔 5.Glass crack; 玻璃破碎; 6.Current Idd is twice higher than initial value. 电流 Idd 大于初时值的 2 倍
2	Low Temperature Storage 低温存放	-30°C±2°C 96H	
3	High Temperature Operation 高温操作	70°C±2°C 48H	
4	Low Temperature Operation 低温操作	-20°C±2°C 48H	
5	High Temperature /Humidity Storage 高温高湿	40°C±2°C 90%RH 48H	

6	Temperature Cycle 冷热循环	-30°C ←→ 25°C ←→ 80°C 5min 30min ←→ 25°C , 5min after 10cycle, Restore 4H at 25°C	
7	Vibration Test (package state) 振荡试验	10Hz~150Hz, 100m/s ² , 120min	Not allowed cosmetic and electrical defects.
8	Dropping test 跌落试验	Drop to the ground from 0.5m height, one time, every side of carton. (Packing condition)	
9	ESD test 静电试验	Voltage: ±4KV R: 330Ω C: 150pF Air discharge, 10time	

11. INSPECTION CRITERION 检查标准

Please consult our Quality Department for detail information.
详细信息请联系我们的品质部门

12. PRECAUTIONS FOR USE OF LCD MODULES

12.1 Handling Precautions

12.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

12.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

12.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

12.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

12.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

— Isopropyl alcohol

— Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer.

Especially, do not use the following:

— Water

— Ketone

— Aromatic solvents

12.1.6 Do not attempt to disassemble the LCD Module.

12.1.7 If the logic circuit power is off, do not apply the input signals.

12.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

- a. Be sure to ground the body when handling the LCD Modules.
- b. Tools required for assembly, such as soldering irons, must be properly ground.
- c. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
- d. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

12.2 Storage precautions

12.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

12.2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$

Relatively humidity: $\leq 80\%$

12.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.

12.3.3 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.